

RAISED ACCESS FLOORS

FACTORY FINISHED PANELS



ALUFOIL BACKING _ FEUILLE ALU _ LAMINA DI ALLUMINIO


- › **Alufoil backing** feuille alu_lamina di alluminio **thickness 0.5 mm**
- › **Woodcore high density** · aggloméré de bois · conglomerato ligneo
- › **Covering:** to be selected by the project manager on end-user. › **Revêtement supérieur:** choisi par la Direction Travaux selon le catalogue "Floors" de CBI Europe.. › **Rivestimento superiore:** a scelta della D.L. in qualsiasi tipo di rivestimento del catalogo Floors CBI Europe.



PT38C

top covering ceramic tiles _ revêtement supérieur gres _ rivestimento superiore ceramica

› **finishes_finitions_finiture**

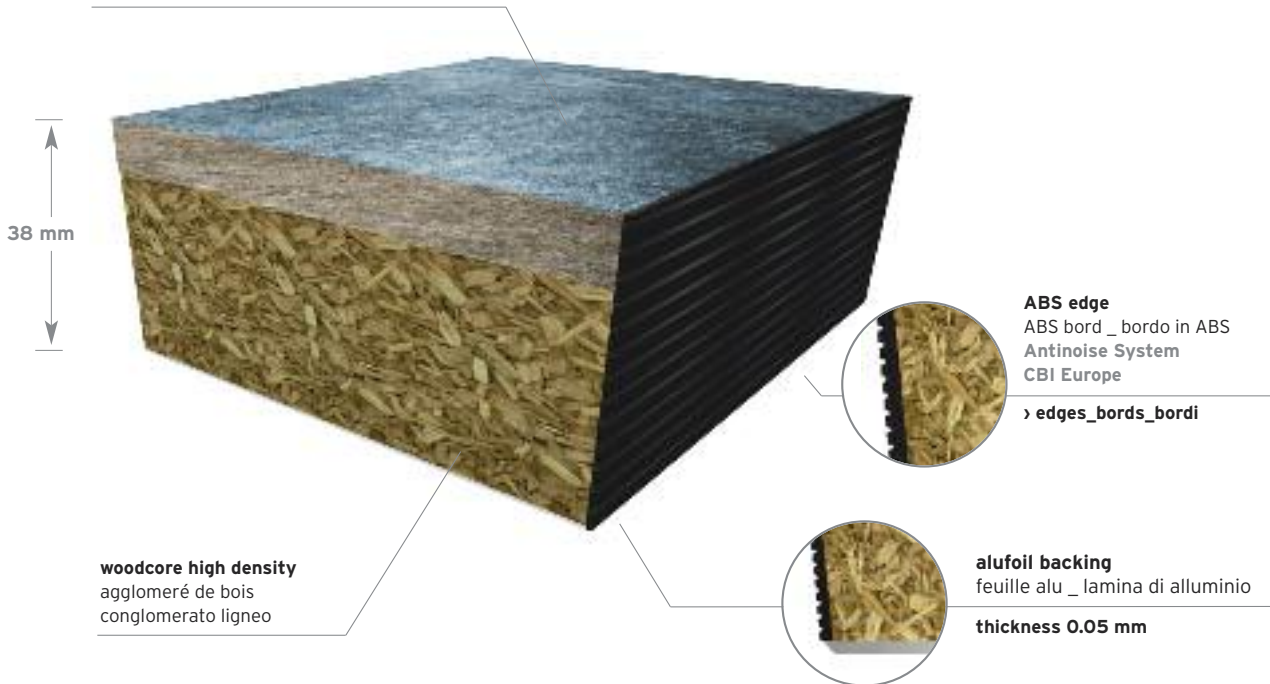

TECHNICAL SPECIFICATIONS

top covering: ceramic tiles_gres_ceramica

		PT30C	PT38C
thickness		30 mm	38 mm
	fire reaction UNI EN 13501-1	Bfl-s1	Bfl-s1
	fire resistance UNI EN 13501-2	REI 30	REI 30

TECHNICAL FEATURES UNI EN 12825

CBI/ST		6,75 kN	7,1 kN
	center of panel - deflection 2,5 mm		
	center of panel - ultimate load	13,4 kN	14,1 kN
	loading class	6	6
	center of panel - deflection 2,5 mm	7,0 kN	7,4 kN
	center of panel - ultimate load	14,0 kN	14,8 kN
	loading class	6	6
	center of panel - deflection 2,5 mm	7,41 kN	7,8 kN
	center of panel - ultimate load	14,8 kN	15,5 kN
	loading class	6	6

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested. Le prove di resistenza al carico sono state eseguite nel laboratorio interno CBI Europe e simulano il metodo di prova indicato dalla normativa UNI EN 12825:2001. I risultati ottenuti ad un'altezza di 20 cm possono variare in funzione dell'installazione e delle condizioni generali del cantiere. Qualora il progetto richieda una certificazione da un ente terzo questa dovrà essere espressamente richiesta.

member_socio



CBI EUROPE
Via Mons. A.O. Romero, 14
Località San Biagio
60027 Osimo (AN) _ Italy
tel + 39 071 71 08 688

administration _ amministrazione:
fax +39 071 71 08 635
order _ ordini: fax +39 071 71 08 561
info@cbi-europe.com
www.cbi-europe.com